

made
in
Germany



Catalog

VOGT Hammer
VOGT TurboSpade VOGT
Air Lance
VOGT Soil Aerator VOGT
AreaCleaner



VOGT[®]
WorkTec

Machines & Sets

VOGT Hammer - Types of Machines	5
Renovator-Sets	6
Floorlayer-Sets	7
Roofer-Sets	8
Civil engineering and road construction-Sets	9
VOGT TurboSpade	10
VOGT Air Lance	12
VOGT Soil Aerator	13
VOGT AreaCleaner	13

Tools, Compressors & Accessories


Scraping	14
Cutting, Accessories for Scaper holder	15
Break open / Removal, Roughening	16
Lay off joints	17
Digging	18
Compacting	19
Ram	20
Conical supplies, Industry	21
Compressed air hoses, Compressors	22
Air accessories	24
Repairing tools	25



100%
made in Germany



Telephone advice



Delivery in 10
days from order



12 months
guarantee

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decopertari.ro

Your contact person for technical advice and disposition



Marian DOBRE

Country Manager

☎ +40(0) 722 30 80 69

office@decopertari.ro



10 + 1 campaign – Economise at your purchasing!

At a order of 10 tools (also different ones) you get one of the cheapest tool additional for free.

Only valid for tools in the pricelist (page 14 - 21).

VOGT Hammer - Types of Machines



VOGT Hammer VH 25

the lightweight machine for all work on wall and ceiling



VOGT Hammer VH 30

the low vibration machine for all work on wall and ceiling



VOGT Hammer VH 50.18

the strong machine for all work on floor, roof and civil engineering



VOGT Hammer VH 60.18

the low vibration machine for all work on floor, roof and civil engineering

Standard machine length



Special lengths at 42 cm up to 330 cm deliverable, with pleasure we advise you.

Technical Specifications

VOGT Hammer VH 25		Type VH	VH 25-70	VH 25-90	VH 25-110	VH 25-130
Operating pressure	3,0 - 6,0 bar	Length	70 cm	90 cm	110 cm	130 cm
Percussion rate	3.200 /min	Weight	3,2 kg	3,5 kg	3,8 kg	4,1 kg
Air Consumption	190 l/min					
VOGT Hammer VH 30		Type VH	VH 30-70	VH 30-90	VH 30-110	VH 30-130
Operating pressure	3,0 - 6,0 bar	Length	70 cm	90 cm	110 cm	130 cm
Percussion rate	3.200 /min	Weight	3,5 kg	3,8 kg	4,1 kg	4,4 kg
Air Consumption	190 l/min					
VOGT Hammer VH 50.18		Type VH	VH 50-70.18	VH 50-90.18	VH 50-110.18	VH 50-130.18
Operating pressure	3,0 - 6,0 bar	Length	70 cm	90 cm	110 cm	130 cm
Percussion rate	1.960 /min	Weight	4,6 kg	5,0 kg	5,4 kg	5,8 kg
Air Consumption	255 l/min					
VOGT Hammer VH 60.18		Type VH	VH 60-70.18	VH 60-90.18	VH 60-110.18	VH 60-130.18
Operating pressure	3,0 - 6,0 bar	Length	70 cm	90 cm	110 cm	130 cm
Percussion rate	1.960 /min	Weight	5,2 kg	5,6 kg	6,0 kg	6,4 kg
Air Consumption	255 l/min					

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decopertari.ro



S

Wall & ceiling

On the wall and at overhead-working, low weight plays an important role. If the machine is too heavy, with time the performance is falling.

Inside-, ceiling- and outside plaster, thermal insulation systems, bonded tiles and decor-coatings are much easier to remove with the VH25/VH30. With the recommended machine length the complete height between floors is accessible. Other machine types and lengths deliverable - with pleasure we advise you.

S

General construction renovators
painters, plasterers, tilers
Basic-Set



With tools for interior/exterior plaster and wall tiles.

VOGT Hammer

Tools

- 1 Delta-P knife M 410 UP
- 1 Wide chisel M 340
- 1 Scraper holder M 5000
- 1 Scraper B 120 S

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 25-90	90 cm	3,5 kg	VH 25-90 S
VH 30-90	90 cm	3,8 kg	VH 30-90 S

Set price also applies to all other standard machine lengths

S

General construction renovators
painters, plasterers, tilers
XL-Set



Extensive tooling for interior, exterior plaster and wall tiles

VOGT Hammer

Tools

- 1 Delta-P knife M 410 UP
- 1 Wide chisel M 340
- 1 Flat chisel M 200
- 1 Scraper holder M 5000
- 1 Scraper B 100 S
- 1 Scraper B 120 S
- 1 Scraper B 160 S

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l
- 1 VOGT Special-Oil 1,0 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 25-90	90 cm	3,5 kg	VH 25-90 S-XL
VH 30-90	90 cm	3,8 kg	VH 30-90 S-XL

Set price also applies to all other standard machine lengths



B

Floor Covering & Parquet

Floor Coverings will be effectively removed with the VH 50.18 / VH 60.18. Weight and strike power are an advantage in tough materials. With the recommended machine length an upright, ergonomic operating position is guaranteed. Other machine types and lengths deliverable - with pleasure we advise you.

B

Floor layer Basic-Set



With the tools for flooring, floor tiles and parquet

VOGT Hammer

Tools

- 1 Delta-P knife M 408.18 UP
- 1 Scraper holder M 5000.18
- 1 Scraper B 160 S
- 1 Scraper B 200 S

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Handle Z 650
- 1 Precision in-line oiler Z 300
- 1 Air hose 10m
- 1 VOGT Special-Oil 0,1 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 50-130.18	130 cm	5,8 kg	VH 50-130.18 B
VH 60-130.18	130 cm	6,4 kg	VH 60-130.18 B

Set price also applies to all other standard machine lengths

B

Floor layer XL-Set



Extensive tooling for flooring, floor tiles and elastically bonded parquet

VOGT Hammer

Tools

- 1 Delta-P knife M 408.18 UP
- 2 Scraper holder M 5000.18
- 1 Scraper B 120 S
- 1 Scraper B 160 S
- 1 Scraper B 200 S
- 1 Special blade B 120 LF
- 1 Parquet wedge PK 90
- 1 Cross blade holder with cross blade H 100 B

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Handle Z 650
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l
- 1 VOGT Special-Oil 1,0 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 50-130.18	130 cm	5,8 kg	VH 50-130.18 B-XL
VH 60-130.18	130 cm	6,4 kg	VH 60-130.18 B-XL

Set price also applies to all other standard machine lengths

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decoptari.ro



D

Roof

Bitumen coatings and -insulation will be removed efficient with the **VH 50.18 / VH 60.18**. Weight and sufficient explosive force advantageous for tough materials.

With the recommended machine length an upright, ergonomic operating position is guaranteed. Other machine types and lengths deliverable - with pleasure we advise you.

D

Roofers Basic-Set



VOGT Hammer

Tools

- 1 Delta-P knife M 410.18 UP
- 1 Scraper holder M 5000.18
- 1 Scraper B 160 S
- 1 Scraper B 200 S

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Handle Z 650
- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10m
- 1 VOGT Spezial-Oil 0,1 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VH 50-130.18	130 cm	5,8 kg	VH 50-130.18 D
VH 60-130.18	130 cm	6,4 kg	VH 60-130.18 D

With the tools for flat roof renovation

Set price also applies to all other standard machine lengths

D

Roofers XL-Set



VOGT Hammer

Tools

- 1 Delta-P-knife M 410.18 UP
- 1 Wide chisel XL M 3140.18 U
- 1 Scraper holder M 5000.18
- 1 Scraper B 160 S
- 1 Scraper B 200 S
- 1 Cross blade holder with cross blade H 425.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Handle Z 650
- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Deflector Z 910
- 1 Air hose 10m
- 1 VOGT Spezial-Oil 0,1 l
- 1 VOGT Spezial-Oil 1,0 l
- 1 Ring wrench 15/19

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VH 50-130.18	130 cm	5,8 kg	VH 50-130.18 D-XL
VH 60-130.18	130 cm	6,4 kg	VH 60-130.18 D-XL

Extensive tooling for flat roof renovation

Set price also applies to all other standard machine lengths

All services are subject to our standard business conditions. Subject to change without notice.



T

Civil engineering and road construction

Undermining operations (horizontal works) is quickly conducted with the **VH 50-70.18 / VH 60-70.18**. With the recommended machine length works in narrow working conditions are possible. Other machine types and lengths deliverable - with pleasure we advise you.

T

Civil engineering and road construction VOGT Hammer Basic-Set



With the Digging spade for hand excavation works

Tool

- 1 Digging spade GA 140.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10m
- 1 VOGT Special-Oil 0,1 l

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 50-70.18	70 cm	4,6 kg	VH 50-70.18 T
VH 60-70.18	70 cm	5,2 kg	VH 60-70.18 T

Set price also applies to all other standard machine lengths

T

Civil engineering and road construction VOGT Hammer XL-Set



Extensive tools for the civil engineering

Tools

- 1 Digging spade GA 140.18 H
- 1 Moll point M 100.18
- 1 Wide chisel M 340.18
- 1 Tamping plate V 1120.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10m
- 1 VOGT Special-Oil 0,1 l
- 1 VOGT Special-Oil 1,0 l

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VH 50-70.18	70 cm	4,6 kg	VH 50-70.18 T-XL
VH 60-70.18	70 cm	5,2 kg	VH 60-70.18 T-XL

Set price also applies to all other standard machine lengths

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decoptari.ro

VOGT TurboSpade - Machine sets



VTS

VOGT TurboSpade

The compressed air spade **VTS 50 / VTS 60** is an effective machine for digging, compacting, break-up and expose.

With the recommended machine length an upright, ergonomic operating position is guaranteed. Other machine types and lengths deliverable - with pleasure we advise you.

T Civil engineering and road construction Basic-Set



With the Digging spade for excavation work

VOGT TurboSpade VTS

Tool

- 1 Digging spade GA 140.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 0,1 l VOGT Special-Oil

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VTS 50-80	80 cm	6,0 kg	VTS 50-80 T
VTS 60-80	80 cm	6,8 kg	VTS 60-80 T



Set price also applies to all other standard machine lengths

T Civil engineering and road construction XL-Set



Extensive tooling for the civil engineering

VOGT TurboSpade VTS

Tools

- 1 Digging spade GA 140.18 H
- 1 Moil point M 100.18
- 1 Wide chisel M 340.18
- 1 Tamping plate V 1120.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l
- 1 VOGT Special-Oil 1,0 l

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VTS 50-80	80 cm	6,0 kg	VTS 50-80 T-XL
VTS 60-80	80 cm	6,8 kg	VTS 60-80 T-XL



Set price also applies to all other standard machine lengths

All services are subject to our standard business conditions. Subject to change without notice.

L

Garden and landscaping set Basic-Set



Extensive tooling for the garden and landscaping

VOGT TurboSpade VTS

Tools

- 1 Digging spade GA 140.18 H
- 1 Wide chisel M 340.18
- 1 Tamping plate V 1120.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VTS 50-80	80 cm	6,0 kg	VTS 50-80 L
VTS 60-80	80 cm	6,8 kg	VTS 60-80 L

Set price also applies to all other standard machine lengths

K

Community and public office set Basic-Set



Extensive tooling for community works

VOGT TurboSpade VTS

Tools

- 1 Digging spade GA 140.18 H
- 1 Wide chisel M 340.18
- 1 Tamping plate V 6080.18 H

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Adapter 3/4" to standard connection Z 200
- 1 Precision in-line oiler Z 300
- 1 Air hose 10 m
- 1 VOGT Special-Oil 0,1 l

Metal transport case

Operating manual



Machine	Length	Weight	Art. No.
VTS 50-80	80 cm	6,0 kg	VTS 50-80 K
VTS 60-80	80 cm	6,8 kg	VTS 60-80 K

Set price also applies to all other standard machine lengths

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decopertari.ro



VOGT Air Lance

The VOGT Air Lance is used to uncover roots and supply lines. As well, the VL suits very good for dry cleaning of armoured concrete elements, plaster joints, construction and agricultural machines.



VOGT Air Lance Basic-Set



VOGT Air Lance VL 3,5

Accessories

- 1 Jet tube, straight
- 1 Rubber protection cap

Employment protection

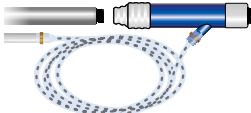
- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VL 3,5	125 cm	3,7 kg	VL 3,5

Accessories VOGT Air Lance

Tool	Application example	l/b [mm]	
 Straight Jet tube	Short jet pipe for tasks in narrow areas		035 230/10
	Loose soil, clean surfaces and joints		035 230
	reduced outlet for smaller compressors until 2,35 m/min		035 235
 Curved Jet tube	Angled spaces, sideways cleaning of pipes or through small openings		035 260
	VOGT Lance extendable up to 7m for work in great depth work out of the distance, e. g. create search trenches for ducts, clean containers, walls, storage areas Keeping safety distance	l = 600	035 270
		l = 1000	035 270/100
		l = 2000	035 270/200
 Flexible extension	Canvas strengthened synthetic hose for areas hard to reach, individual length on request		according to length
 Sandblasting unit	Sandblasting of areas to remove rust, paint and rests of coatings or bitumen, refresh the natural colours of natural stone walls, clean concrete walls, extensions for inaccessible areas available		035 500

All services are subject to our standard business conditions. Subject to change without notice.



VBL

VOGT Soil Aerator

The VOGT Soil Aerator reaches deep-set, compacted soil layer and suddenly gives a large amount of compressed air free, which opens contaminated capillaries. The aeration hole will be filled up with open-pored granulate (Terramol), which removes waterlogging long-term and enables oxygen to reach the roots.

VBL

VOGT Soil Aerator Basic-Set



VOGT TurboSpade VTS 50-50

Tools

- 1 Aeration-tube 95 cm with rubber protection cap, aeration-adapter and conical holder
- 1 Manifold- and control unit

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Accessories

- 1 Precision in-line oiler Z 300
- 1 VOGT Special-Oil 0,1 l
- 1 Special aerating hose 1 1/4" 10m

Metal transport case

Operating manual

Machine	Length	Weight	Art. No.
VBL	155 cm	11,40kg	VTS 50-50/VBL 95

VOGT AreaCleaner



VAC

VOGT AreaCleaner

The VOGT AreaCleaner is a special developed joints clearing machinery for the renovation of plasterstreets, sidewalks, places and historical facilities, which were paved in loose and open construction.

VAC

VOGT AreaCleaner



VOGT AreaCleaner

Employment protection

- 1 Working gloves
- 1 Eye protectors
- 1 Ear protection plugs

Operating manual

Machine	Weight	Art. No.
VAC	28,0 kg	VAC-60

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decoptari.ro


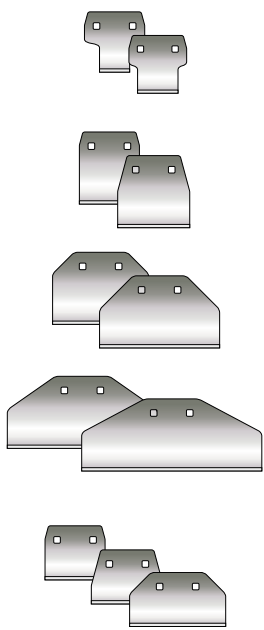
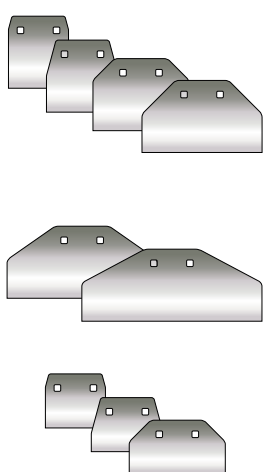

Tools

All illustrations and descriptions with tools in use are only exemplary. Each individual tool is also suitable for different application areas and application scenarios. The selection of the right tools behave solely the experience and know-how of the user or focus according to the individual operating conditions and materials on-site.



Scraping

- scraping off floor coverings and coatings
- removing bitumen and adherent materials
- removing plaster and tiles






Tool	Application example	l/b [mm]	○ 14	○ 18
 Scraper holder	curved, with fastening set 902 011	300/100	M 5000	M 5000.18
	straight, with fastening set 902 011 lancing road pavement joints	300/100	MG 5000	MG 5000.18
 Scraper beveled	special duties in small areas, very insistent materials	100/50	B 50 S	
		100/70	B 70 S	
	concrete on lever surface, coverings, thin concrete, sprayed asbestos, bonded tiles, adhesives- and concrete remains, projection, roadmarkings	120/100	B 100 S	
		120/120	B 120 S	
	bitumen, adhesive, paints, knifing filler and remains, PVC-, CV-, linoleum- and rubber floors, cork, needle felt, carpets	120/160	B 160 S	
		120/200	B 200 S	
	easy removeable coverings and adherences, foam backings, bonded insulation boards, all kind of remains on floors	120/250	B 250 S	
		120/300	B 300 S	
	epoxy resin and 2-component coatings, insulating layer, bitumen, knifing filler	90/100	B 100 KS	
		90/120	B 120 KS	
		90/160	B 160 KS	
 Scraper edgeless	coatings on steel and other solid subsoils	120/100	B 100	
	decor plaster on soft surface, top plaster on WDVS by preventing damages of the reinforcement, roadmarkings	120/120	B 120	
		120/160	B 160	
		120/200	B 200	
	cleaning of asphalt and concrete surfaces, cleaning remains of bulk material, removing roof gravel	120/250	B 250	
		120/300	B 300	
	epoxy- and 2-K-coverings, insistent insulations	90/100	B 100 K	
		90/120	B 120 K	
		90/160	B 160 K	
 Deflection device Deflector	with fastening set 902 020, rolls up floor coverings	b = 120	U 120	
	keeping away long insistent materials		Z 910	

Ⓢ On request we deliver other scraper types and sizes

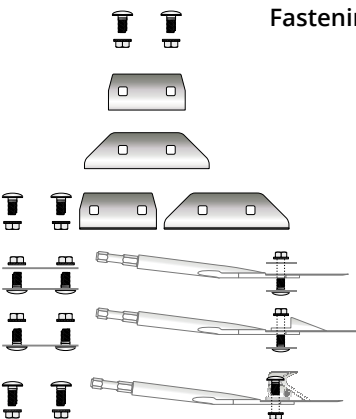
All services are subject to our standard business conditions. Subject to change without notice.

Cutting

- removing PU-elastic adhesive parquet
- cutting and removing synchronous

Tool	Application example	l/b [mm]		
 Frankenklinge beveled on both sides for panel width up to 100 mm	cutting PU-elastic adhesive parquet and laminate floors, ship's decks and facade claddings ⊗ the more stiff the adhesive, the smaller the scraper should be	150/120	B 120 F	
		150/160	B 160 F	
		150/200	B 200 F	
 for panel width from 100 mm up to 150 mm	cutting PU-elastic adhesive parquet and laminate floors, boot decks and facade panellings ⊗ the more stiff the adhesive, the small the scraper should be	200/120	B 120 LF	
		200/160	B 160 LF	
 Trapezklinge sharply whetted	split the 2-layered polyester fabric Kiesel Okalift SuperChange. ⊗ With the new system, wall coverings and floor coverings can be exchanged carefully and without big effort	225/120	B 120 T	
		225/160	B 160 T	
 Parquet wedge	with fastening set 902 060, reduces the frictional resistance of PU-adhesives	b = 90	PK 90	
 Crossblade holder with blade	Crossblade for cutting off soft flooring in all width		H 100 B	
 Doublecrossblade holder with blades	readily soluble coverings and adherent materials, foam backings carpet, glued insulating panels, dirt remains at floor	b = 120	H 120 B	
		b = 160	H 160 B	
		b = 200	H 200 B	
 Crossblade beveled on both sides	Blade for Crossblade holder H 100 B / Doublecrossblade holder H 120 B, H 160 B, H 200 B		B 55	
 Cutting-device with cutting blade	Pre-cutting of soft flooring, seals (1-2 lays)		H 425 H	H 425.18 H
 Cutting blade beveled on both sides	Blade for cutting-device H 400 H / H 400.18 H		B 25	

Accessories and attachments for Scraper holder

	Fastening set			
	standard fastening set for Scraper holder		902 008	
	small reinforcing plate for Scrapers until 120 mm width		902 004	
	large reinforcing plate for Scrapers up to 160 mm width		902 005	
	standard fastening set with small and large reinforcing plate		902 011	
	fastening set below, to achieve an even operating angle		902 020	
	fastening set for Parquet wedge		902 060	
	fastening set for Crossblade/Doublecrossblade holder		902 016	
	Ring wrench	deep-offset, size 15-19 for Scraper holder and Handle	861 004	


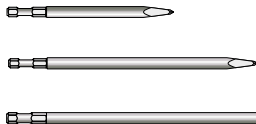
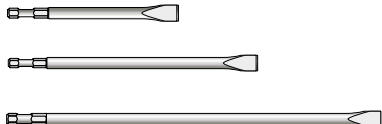


All services are subject to our standard business conditions. Subject to change without notice.

Contact:
 ☎ +40(0)722 30 80 69
 📠 +40(0)21 348 32 00
 www.decopertari.ro



Break open / Removal


- cutting off plaster and tiles
- forcing open brickwork, screed, wood floors
- removing bitumen boards and parquet

Tool	Application example	l/b [mm]	14	18
 Delta-P knife curved with sharpening below	lime- and gypsum plaster, parquet, laminat, bitumen, strong tiles, natural-stone boards, magnesit bounded wood-wool building slab, gypsum plaster boards, lathing	300/80	M 408 UP	M 408.18 UP
		300/100	M 410 UP	M 410.18 UP
 Wide chisel XL curved with sharpening below	removing of bitumen, insulation board, thermal roof gravel	280/140	M 3140 U	M 3140.18 U
 Moil point	concrete, rock, lime-sand brickwork	14 l = 260 18 l = 300	M 100	M 100.18
		l = 400	M 100 L	M 100.18 L
		l = 600	---	M 100.18 XL
 Flat chisel	concrete, rock, brickwork bonded screed, tiles in mortar bed, cement facing	260/25	M 200	M 200.18
		400/25	M 200 L	M 200.18 L
		600/25	---	M 200.18 XL
 Flat chisel curved	concrete, rock, brickwork, bonded screed, tiles in mortar bed, cement facing	260/25	M 200 B	M 200.18 B
		400/25	M 200 BL	M 200.18 BL
 Wide chisel	insistable plaster, brickwork, tiles in mortar bed, swimming screed	14 260/40 18 300/40	M 340	M 340.18
	cement- and lime-cement plaster	260/60	M 360	M 360.18
	lime- and gypsum plaster	260/80	---	M 380.18
 Spade chisel	removing of solid ground until soil class 6	400/65	M 365	M 365.18



Roughening

- rehandling sandstone surfaces
- crushing concrete edges



Tool	Application example	l/b [mm]	14	18
 Bush hammer	roughening and crushing edges of concrete, screed, sandstone, granite	 l = 150 7 x 7 Zähne 60 x 60	S 860 H	S 860.18 H
		 l = 150 9 x 9 Zähne 80 x 80	S 880 H	S 880.18 H

⊙ All Bush hammers are delivered with Conical holder KH 140 or KH 140.18
 For further sizes of Conical holder please turn to page 21
 *The use of tools with 14 mm input is limited, due to leverage force



Lay off joints

- cleaning brickwall joints
- removing bonded pavement

Tool	Application example	l/b [mm]	⊙ 14	⊙ 18
	Joint chisel slotted joints in different depth	300/5	M 605	M 605.18
		300/7	M 607	M 607.18
	Joint chisel on rolls taking off fair-faced brickwork-, plaster- and screed perpend joints by constant depth until 20 mm	300/5	M 605 R	M 605.18 R
		300/7	M 607 R	M 607.18 R
	Nose chisel cleaning of bituminous joints	300/7	---	M 637.18
	Sheet metal chisel ripping off tin roofs, oil tanks, strapping	l = 300	M 650	M 650.18
		l = 300	M 650 R	M 650.18 R
	Rolls set suitable for M 605, M 605.18, M 637.18, M 650, M 650.18 to change or refitting		901 003	
 	Gouge wide joints, electric installation	250/22	M 725	M 725.18
		350/22	---	M 725.18 L
	Roller constant joint depth, for Gouge-, Joint-Nose- and Sheet metal chisel		RW 600	
		① For further tools to remove cement joints, please turn to page 14 and 16		

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

☎ +40(0)722 30 80 69

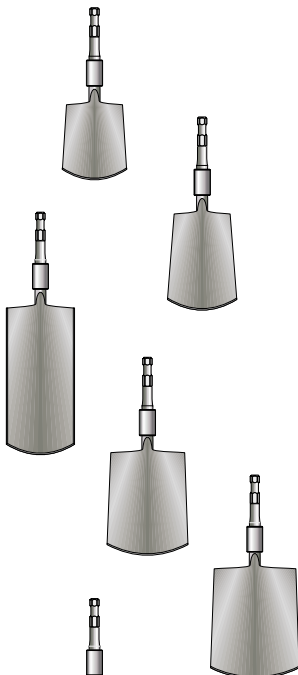
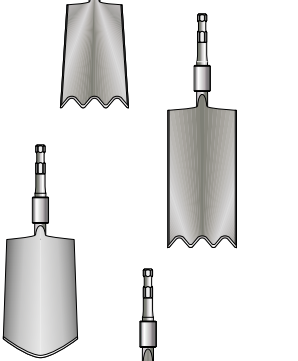

☎ +40(0)21 348 32 00

www.decoptari.ro



Digging

- loosening gravel and ground
- trepanning root balls

	Tool	Application example	l/b [mm]	⬡ 14	⬡ 18
	Digging spade	short, for underpinning	l = 360 b = 140	GA 140 KH	GA 140.18 KH
		Standard length universal, hardly loosening soil	l = 430 b = 140	GA 140 H	GA 140.18 H
		long version, special for tree nurseries	l = 540 b = 140	GA 140 LH	GA 140.18 LH
		universal, easily loosening soil	l = 430 b = 175	GA 175 H	GA 175.18 H
		easily loosening soil	l = 430 b = 190	GA 190 H	GA 190.18 H
	Root spade	cutting roots	l = 430 b = 140	GWA 140 H	GWA 140.18 H
		trepanning root balls	l = 540 b = 140	GWA 140 LH	GWA 140.18 LH
	Half-round spade	shoveling and undermining	l = 430 b = 160	GHA 160 H	GHA 160.18 H
	Root ball spade	trepanning root balls	l = 450 b = 160	GBA 160 H	GBA 160.18 H
	Clay spade	small, for clay- and loam soil	l = 470 b = 85/120	GTA 85 H	GTA 85.18 H
	Face shovel	cutting of soil, shoring, shovel work	l = 440 b = 200	GSA 200 H	GSA 200.18 H

⌚ All Spades are delivered with Conical holder KH 140 or KH 140.18
 Minor deviation of the dimensions are possible, because they are hand-forged
 For further sizes of Conical holder please turn to page 21
 *The use of tools with 14 mm input are limited, due to leverage force



Compacting

- compacting soil, concrete, gravel and asphalt
- constructing pressed clay walls

Tamping plate round

Application example

soil, concrete, wet mix macadam,
compacting filling material
further sizes on request deliverable

l/b [mm]

14

18

Ø 70
l = 220

V 5070 H

V 5070.18 H

Ø 95
l = 220

V 5095 H

V 5095.18 H

Ø 108
l = 220

V 5108 H

V 5108.18 H

Ø 130
l = 220

V 5130 H

V 5130.18 H

Ø 170
l = 220

V 5170 H

V 5170.18 H



semicircle

compacting around a canalisation
entrance and underground
hydrant

180/40
l = 220

V 6040 H

V 6040.18 H

180/80
l = 220

V 6080 H

V 6080.18 H

trapezoid

driving-in road markers, compacting
narrow areas, filling material and
taper corners, compacting filling
material

60-120/120
l = 220

V 4120 H

V 4120.18 H

15-80/180
l = 220

V 4080 H

V 4080.18 H

quadratic

compacting soil, concrete, wet mix
macadam and filling material
further sizes on request deliverable

100/100
l = 220

V 1100 H

V 1100.18 H

120/120
l = 220

V 1120 H

V 1120.18 H

140/140
l = 220


V 1140 H

V 1140.18 H

170/170
l = 220

V 1170 H

V 1170.18 H



curved

compacting compressed
concrete lining by inclination
further sizes on request deliverable



120/120
l = 220

V 1120 H

V 1120.18 H

narrow

compacting of chappy soil,
concrete and clay in moulds

150/35
l = 220

V 8150 H

V 8150.18 H

200/35
l = 220

V 8200 H

V 8200.18 H

250/35
l = 220

V 8250 H

V 8250.18 H

300/35
l = 220

V 8300 H

V 8300.18 H

rectangular

compacting small
ditches,
between pipelines

340/80
l = 230

V 2080 H

V 2080.18 H

200/100
l = 230

V 2100 H

V 2100.18 H

340/120
l = 240

V 2120 H

V 2120.18 H

Cube packer

compacting small ditches,
pipeline bed

400/Ø 50
l = 220

V 7045 H

V 7045.18 H

⊗ All Tamping plates will be delivered with Conical holder KH 200 or KH 200.18

For further sizes of Conical holder please turn to page 21

On request we deliver Tamping plates also with volcanic plate

*Tools because of leverage only conditional with 14 mm chisel input usable

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

☎ +40(0)722 30 80 69

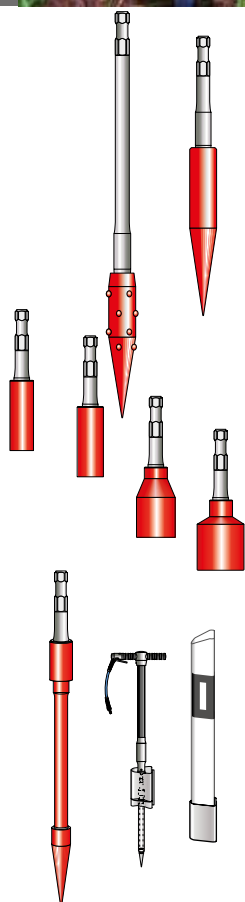
☎ +40(0)21 348 32 00

www.decoptari.ro



Pile driving

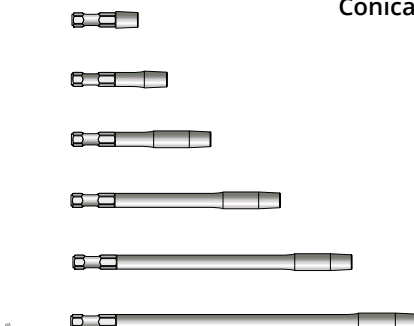
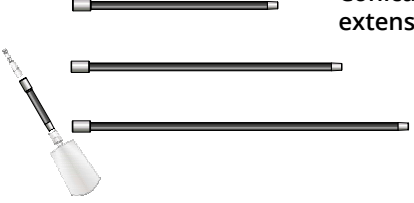
- Pile hole pricker
- driving-in holder, bushing and piles
- driving-in snow piles




Tool	Application example	l/b [mm]	⊙ 14	⊙ 18
Pile pitcher	making holes for snow-, sign and fence piles	l = 430 Ø 40	R 1040 H	R 1040.18 H
Dung depot pricker	pricking of injection holes to fill in long-term fertilizer. The welded bumps reduce the hole wall compacting and slacken the soil	l = 660 Ø 45	R 3040 H	R 3040.18 H
Pile driver	driving-in piles	l = 230 innen-Ø 22	R 5022 H	R 5022.18H
		l = 230 innen-Ø 30	R 5030 H	R 5030.18H
		l = 230 innen-Ø 50	R 5050 H	R 5050.18H
		l = 230 innen-Ø 60	R 5060 H	R 5060.18H
Propulsion peak	driving-in holding devices for e.g. road markers, playground tools anchorage and greenhouses	l = 590	R 2028 H	R 2028.18H

⊙ Pile pitcher will be delivered with Conical holder KH 200 or KH 200.18
 Propulsion peak and all pile drivers will be delivered with Conical holder KH 140 or KH 140.18
 Dung depot pricker will be delivered with Conical holder KH 500 or KH 500.18
 *The use of tools with 14 mm input are limited, due to leverage force

Conical supplies

Tool	Application example	l/b [mm]	14	18
 Conical holder	short version for special duties	l = 95	KH 95	KH 95.18
	standard for Digging spade, Bush hammer	l = 140	KH 140	KH 140.18
	standard for Compacting plate	l = 200	KH 200	KH 200.18
	long version for special duties	l = 300	KH 300	KH 300.18
	long version for special duties	l = 400	KH 400	KH 400.18
	long version for special duties	l = 500	KH 500	KH 500.18
 Conical adapter	connection joint between Conical holder and Spade or Conical extension		905 001	
 Conical extension	for works which must be done with a safety zone, the Conical extension is placed between Conical holder and Spade	l = 600	KV 600	
		l = 800	KV 800	
		l = 1000	KV 1000	

Industry

Tool	Application example	l/b [mm]	14	18
 Plugchisel	packing up of ballast	l = 340 b = 80	---	M808.18
 Tamper foot	cleaning cooling pipes in combustors	l = 570 b = 60	VI 1470 H	VI 1470.18 H
		l = 770 b = 60	VI 1770 H	VI 1770.18 H
 Cleaning pin	breaking through openings	l = 250 Ø 6, 8, 10	VI 30xx H	VI 30xx.18 H
		l = 250 Ø 12, 14, 16	VI 30xx H	VI 30xx.18 H
		l = 250 Ø 18, 20, 28	VI 30xx H	VI 30xx.18 H
 Heat protection tube	machine protection until 650° C or 1150° C		according to machine length	

ⓘ For further tools for industrial use please turn to page 14, 16

All Tampers foot, Cleaning pin and Pipe scraper will be delivered with Conical holder KH 140 or KH 140.18

* Over the standard size used Conical holder or Conical extension advance the lever arm and increase the risk of breakage on tool and equipment - Reduce leverage force. Also the power of impact is reduced.

**Couldn't find the right tool?
Further tools and custom-made tools on request!**

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

+40(0)722 30 80 69

+40(0)21 348 32 00

www.decoptari.ro

Compressed air hose



Compressed air hose

- high quality
- suitable operation



Metal hose drum

Qualities

PU-air hose 10x14,5 complete with connections and bend protection

l [m]

l = 20

Z 100



PU-compressed air hose

very flexible, 9x14 complete with connections and bend protection

l = 10

Z 110

Flat air hose 3/4"

full-synthetic with claw coupling

l = 10

813 010

l = 20

813 020



Flat air hose 1"

full-synthetic with claw coupling

l = 10

816 010

l = 20

816 020

Flat air hose 1 1/4" jet taper hose

full-synthetic with claw coupling

l = 10

817 010

l = 20

817 020

Compressors



Petrol- & Dieselcompressors

- powerful and high performance
- independent of power supply system



Petrol Compressor

2 piston
air wheels

displacement
filling volume

effective at 7 bar
tank capacity

weight

size

energy

500 l/min
390 l/min

20 l

81 kg

l = 750 mm
b = 950 mm
h = 700 mm

Honda
2cyl. 4-stroke
petrol engine
4 kW

KF-500-20-B

⊕ usable for one VOGT Hammer or VOGT TurboSpade



Kaeser Mobilair M 13

screw
compressor

1200 l/min

190 kg

l = 1080 mm
1390 mm
b = 800 mm
h = 790 mm

Honda
2cyl. 4-stroke
petrol engine
13,2 kW

M 13

⊕ usable for one VOGT Hammer or VOGT TurboSpade



Kaeser Mobilair M 31

screw
compressor

3150 l/min

580 kg

l = 2920 mm
3450 mm
b = 1260 mm
h = 1300 mm

Kubota
3cyl. 4-stroke
diesel engine
24,1 kW

M 31

Details:

- corrosion-free, scratch-resistant and stable PE sound protection hood. Colour optional in: yellow, blue, green, red or orange
- chassis unbraked with height-adjustable tongue
- compressed-air-aftercooler and compressed-air-cyclone-separator
- compressed air-back warming
- ecologically sustainable compressor oil
- 2x 3/4" Air connection

All services are subject to our standard business conditions. Subject to change without notice.



230 V Compressor

- robust and long lasting
- with 230 V, useable anywhere

Scrapping / Cutting
Accessories for Scraper
holder

Break open / Removal
Roughening
Lay off joints

Digging
Compacting

Pile driving
Conical supplies
Industry

Compressed air hose
Compressor

Accessories
Repairing tools



Kaeser Premium Compact 400/30 PW

2 piston
Pico paper air filter

displacement filling volume	effective at 7 bar tank capacity	weight	size	energy
450 l/min 370 l/min	285 l/min 30 l	68 kg	l = 640 mm b = 570 mm h = 1010 mm	230 V 16 A 1,9 kW

KC 400/30 PW

⊕ usable for one VOGT Hammer or VOGT TurboSpade



VOGT CompactRack

Retrofit &
removable
for KC 400/30 PW

13 kg l = 270 mm b = 500 mm h = 700 mm

801 001

⊕ Enables quick relocation. Compact holder for VOGT Hammer, tools, accessories and hose drum. Delivery without drum hose, Compressor, Hammer, tool and accessories



Kaeser Premium Car 450/30 PW

2 piston
pico paper air filter
air wheels

450 l/min 370 l/min	285 l/min 30 l	80 kg	l = 870 mm b = 560 mm h = 590 mm	230 V 16 A 2,2 kW
------------------------	-------------------	-------	--	-------------------------

PCA 450/30 PW

⊕ usable for one VOGT Hammer or VOGT TurboSpade



Compressed-air Storage

aluminium
pressure tested
until 30 bar

--- 33 l	7 kg
-------------	------

VDP 33K

⊕ additional compressed air reservoir is providing air pressure if compressor works at upper limit increasing the air volume by soil detonation with VOGT Soil Aerator



400 V Compressor

- powerful and long lasting
- airpressure for more then one machine



Kaeser Premium Car 660/70 D

2 piston
pico paper air filter
air wheels

displacement filling volume	effective at 7 bar tank capacity	weight	size	energy
660 l/min 545 l/min	425 l/min 70 l	118 kg	l = 1060 mm b = 700 mm h = 630 mm	400 V 16 A 3 kW

PC 660/70 PD

⊕ usable for one VOGT Hammer or VOGT TurboSpade



Kaeser Mobilair M 13 E

screw
compressor

1200 l/min 1390 mm b = 800 mm h = 790 mm	190 kg	400 V 32 A 7,5 kW
---	--------	-------------------------

M 13 E

⊕ usable for up to five VOGT Hammers or VOGT TurboSpades

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

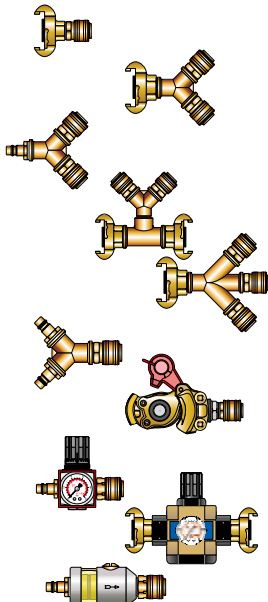



☎ +40(0)722 30 80 69

☎ +40(0)21 348 32 00

www.decoptari.ro








Accessories

	Adapter	Qualities		
		3/4" to standard connection		Z 200
	Distributor	3/4" to 2 x standard connection		Z 220
		standard connection to 2 x 3/8"		Z 230
		2x 3/4" to 2 x standard connection		Z 240
	Collector	3/4" to 3 x standard connection		Z 250
		2 x standard connection to standard connection in order to bring two air lines together		Z 260
	Filling connection for Trucks	usable to get compressed air from a truck		Z 700
	Pressure controller	with manometer metal protection, standard connection, adjustable by 0,5 - 10 bar		Z 400
		with manometer, 3/4" adjustable by 0,5 - 16 bar		Z 410
	Precision in-line oiler VOGT special-oil	"maintenance unit" for VH / VTS, lubricating tool and chisel input		Z 300
		not resinating - for constant maximum power of impact	0,1 liter	Z 510
			1,0 liter	Z 500
			5,0 liter	Z 550
		High-temperature oil especially for operations in blast furnaces or similar	1,0 liter	832 010
		Bio-oil especially for operations in the Nature or in the food sector	1,0 liter	834 010
	Gum damper	Gum damper for the activator		Z 600
	Handle	for better handling	VH 25 VH 30	Z 625
			VH 50.18 VH 60.18	Z 650
	Sound absorber	covers the hammer mechanism, absorbing the sound level	alle VH / VTS	Z 850
	Protection bag	protecting the chisel input against dust	VH 25 VH 30	Z 925
		VH 50.18 VTS 50	Z 950	
		VH 60.18 VTS 60		
	Gloves	maximum damping for permanent work, made of sturdy leather		870 006
		gummed cotton working gloves for good grip, blue		870 005
	Eye protectors	light Eye protectors		870 007
	Safety fence	light, 3-piece protection fence, dimensions by piece 100 x 100 cm, weight 11 kg		Z 900



Repairing tools

	Grinding disk Ø 125 mm	beveling chisel and scraper with angle grinder	qualities	
			24 grain for chisel	861 008
			40 grain for scraper	861 001
	Ring wrench 15 - 19	deep-offset, for Scraper holder and Handle		861 004
	Allen key 18 mm	heavy wrench for changing chisel input or stick	VH 50.18 VH 60.18 VTS 50 VTS 60	150 240
	Retaining ring tong	changing the retaining ring	all VH / VTS	861 005
	Ring wrench for hammer mechanism	heavy wrench for unscrewing hammer mechanism	VH 25 VH 30	025 230
			VH 50.18 VTS 50	050 230
	Clamping jaws for hammer mechanism	repairing hammer mechanism	VH 25 VH 30	025 200
			VH 50.18 VTS 50	050 200
	Clamping jaws for handle	changing stick	VH 25 VH 30	025 210
			VH 50.18 VTS 50	050 210
	Clamping jaws for stick	light model for changing stick with magnetic adhesive force	VH 25 VH 30	025 250
			VH 50.18 VTS 50	050 250
	Threadsealing	bonding stick, 50 ml	VTS 50 VTS 60	861 013
	Screw locking- Set	cleaning and bonding chisel input, 400 ml / 10 ml	all VH / VTS	861 014
	Cleaner	cleaning hammer mechanism, when dirt or to much lubrication is in the housing, 500 ml	all VH / VTS	861 015
	Handcleaning- Cream	for extremely dirt e.g. bitumen, paint, oil and so on, 200 ml		870 011

Scrapping / Cutting
Accessories for Scraper
holder

Break open / Removal
Roughening
Lay off joints

Digging
Compacting

Pile driving
Conical supplies
Industry

Compressed air hose
Compressor

Accessories
Repairing tools

All services are subject to our standard business conditions. Subject to change without notice.

Further VOGT Products for **soil loosening and injection** of soil conditioner to vitalize trees and to remove waterlogging



VOGT Geo Injector carry

Comprehensive
optimization
with **one** Machine



VOGT Geo Injector trolley

Sustainable
soil improvement
made-to-measure



VOGT Geo Injector fluid

placing accurate
and **loosening**
strong



VOGT PowerPlanter



VOGT Geo Injector mobil



VOGT Geo Injector farmer



VOGT GeoTiller

All services are subject to our standard business conditions. Subject to change without notice.

Fax: +40(0) 21 348 32 00

Customer ID

Contact person

Street

Postcode / Place

Telephone

Fax

Mobile

E-Mail

☎ +40(0) 722 30 80 69

+40(0) 21 348 32 00

office@decopertari.ro

www.decopertari.ro

VOGT®
WorkTec

[illegible]

Date, Place

Signature

All services are subject to our standard business conditions. Subject to change without notice.

Contact:

☎ +40(0)722 30 80 69

 +40(0)21 348 32 00

www.decopertari.ro

We are reachable for you:

Monday - Thursday 07:30 - 19:30
Friday 07:30 - 17:30

SC UNICO PROFIT SRL

Str. TICUS nr. 1 sector 3
D-032137 Bucuresti

☎ +40(0) 722 30 80 69

📠 +40(0) 21 348 32 00

office@decopertari.ro
www.decopertari.ro



VOGT®
WorkTec